
Data from GATE annotations

Further details in 2 related publications:

Jodi Schneider, Alexandre Passant, and Stefan Decker "<u>Deletion Discussions in Wikipedia: Decision Factors and Outcomes.</u>" WikiSym2012.

Jodi Schneider. Ph.D. thesis. "Identifying, Annotating, and Filtering Arguments and Opinions in Open Collaboration Systems" National University of Ireland, Galway (Digital Enterprise Research Institute) http://purl.org/jsphd

1. Open Datastore

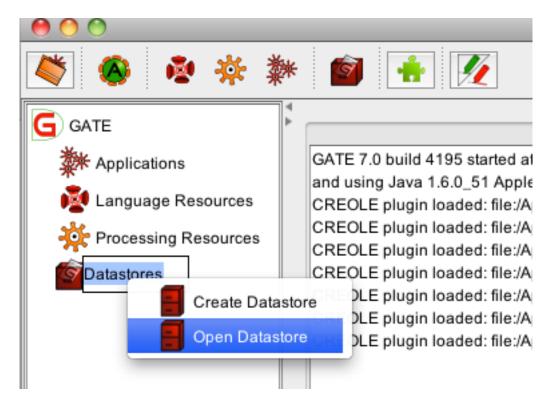


2. Choose SerialDataStore




3. Choose directory (corrected-round2-merged-datastore)




4. Clicking on the name of the datastore shows its contents:

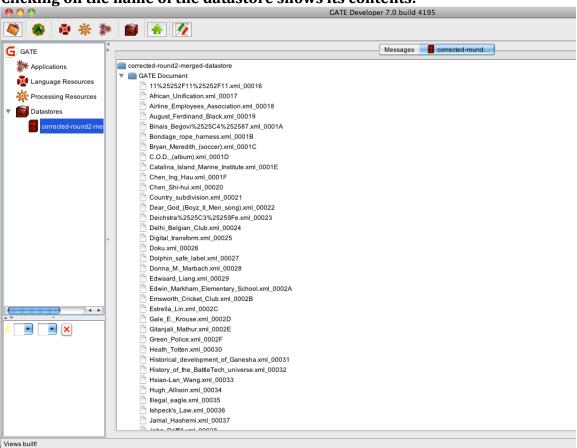

5. Clicking on a document adds it to language resources (opens single document). In the document, the Annotation Sets or Annotation List can be shown. Key and LauraKey represent the two human annotation sets.

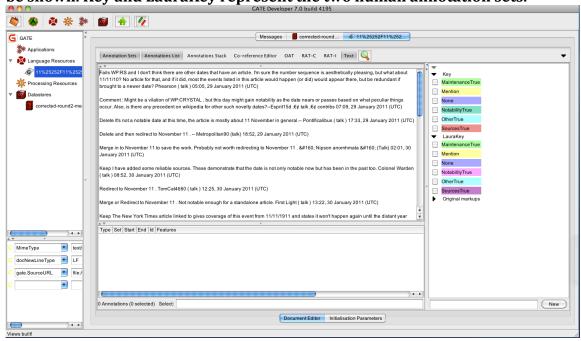

6. Annotations can be shown in the text and in the sets by clicking checkboxes in the Annotation Set pane.

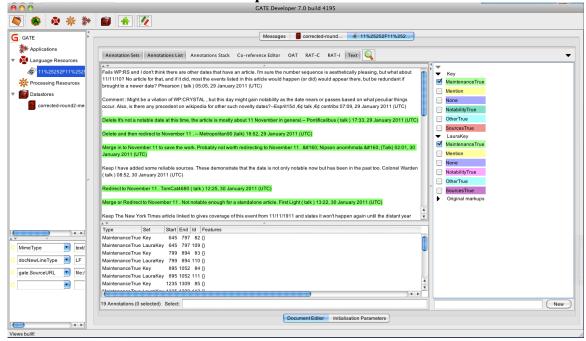

Tested 2014-03 with GATE Version 7.0, build 4195 JVM version: 1.6.0_51 from Apple